

FIG. 1 is a perspective view of a device 10 in a first configuration. The device 10 includes a base 130, a plurality of vertical members 20, and a top member 15. The base 130 is connected to the top member 15 by a central member 26. The vertical members 20 are spaced apart from each other and are connected to the base 130 and the top member 15. The top member 15 has a plurality of openings 15a. The device 10 is shown in a perspective view.

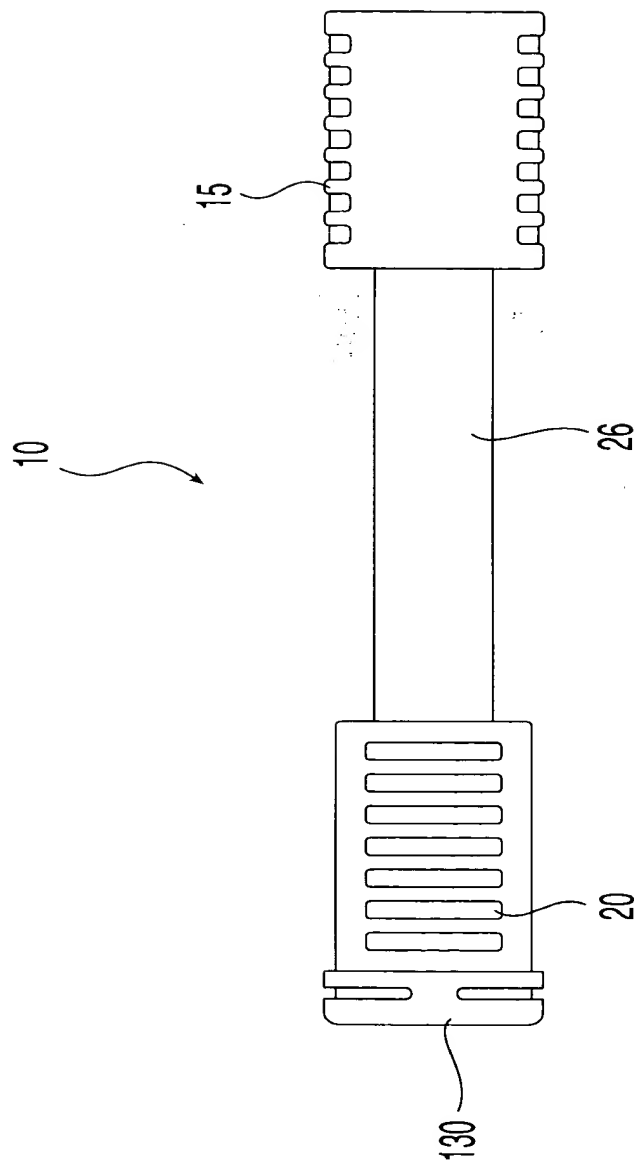
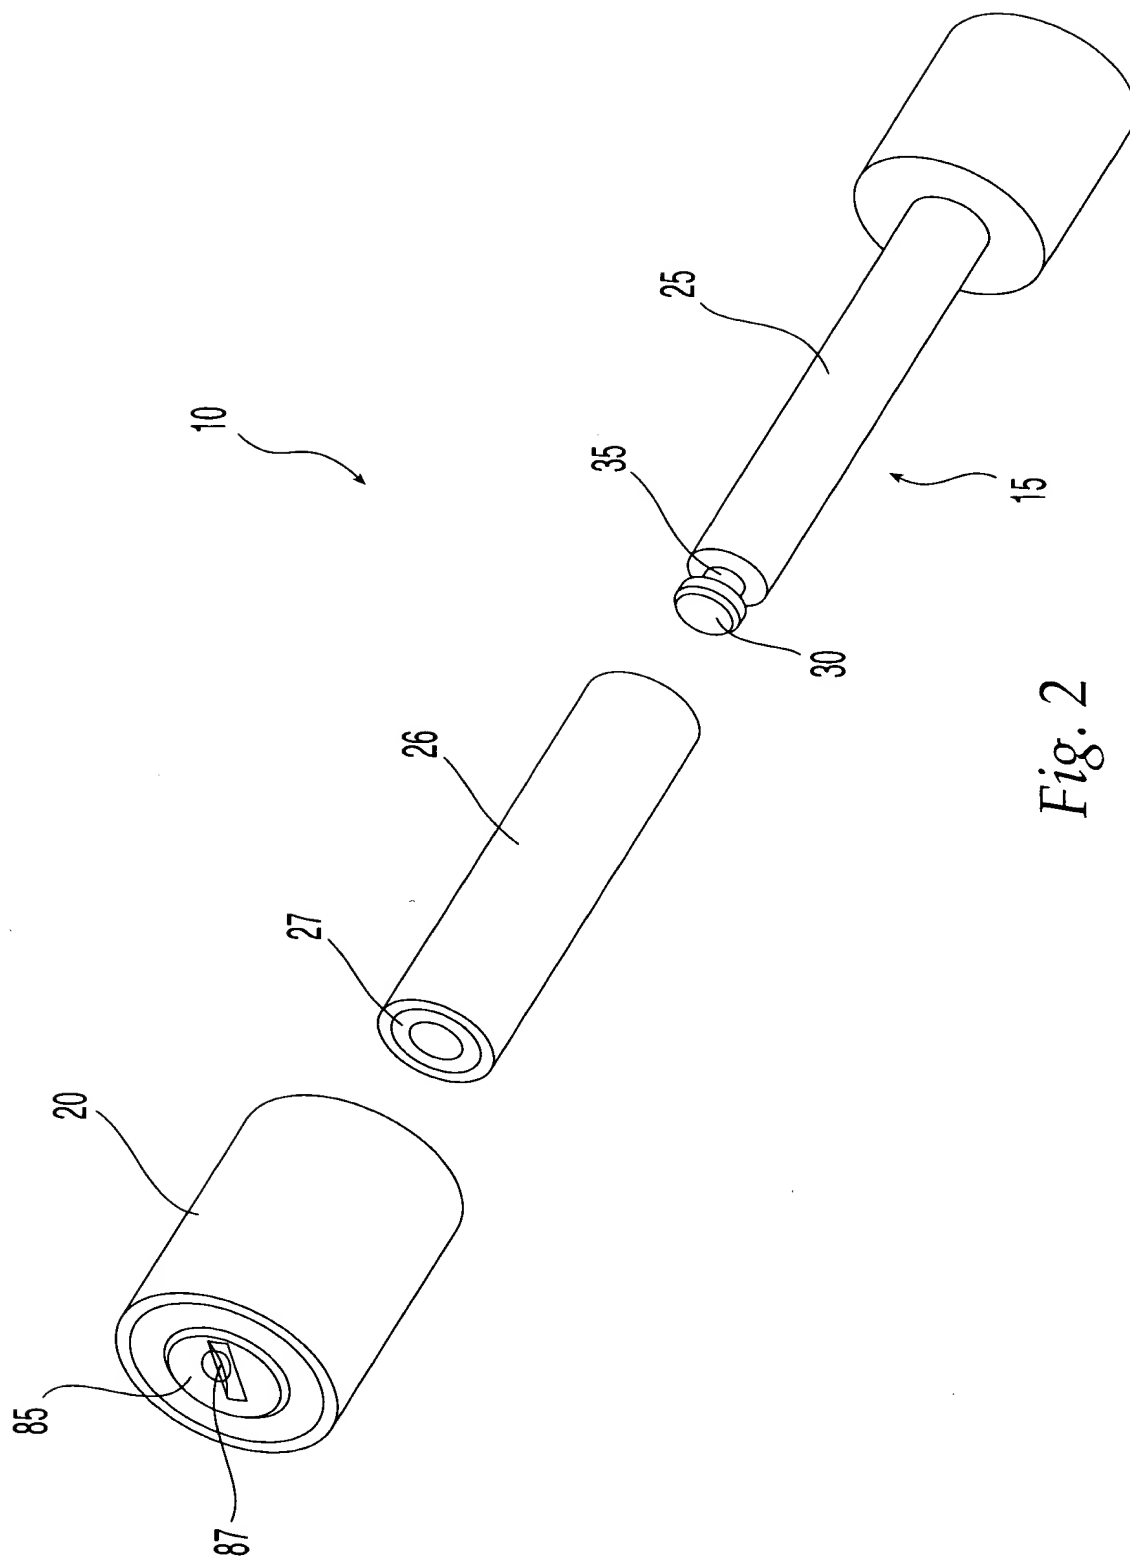


Fig. 1

[illegible]

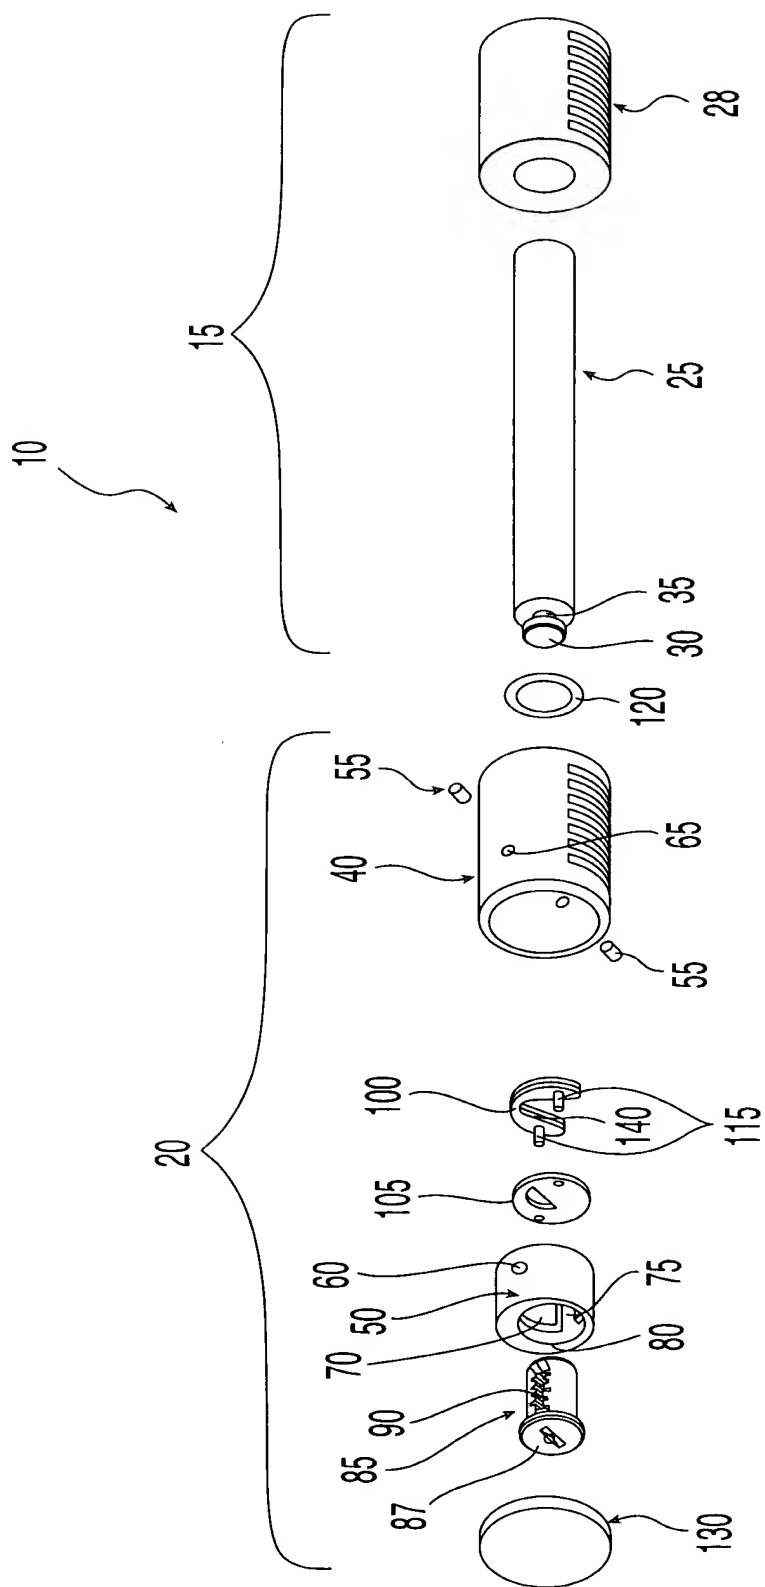


Fig. 3

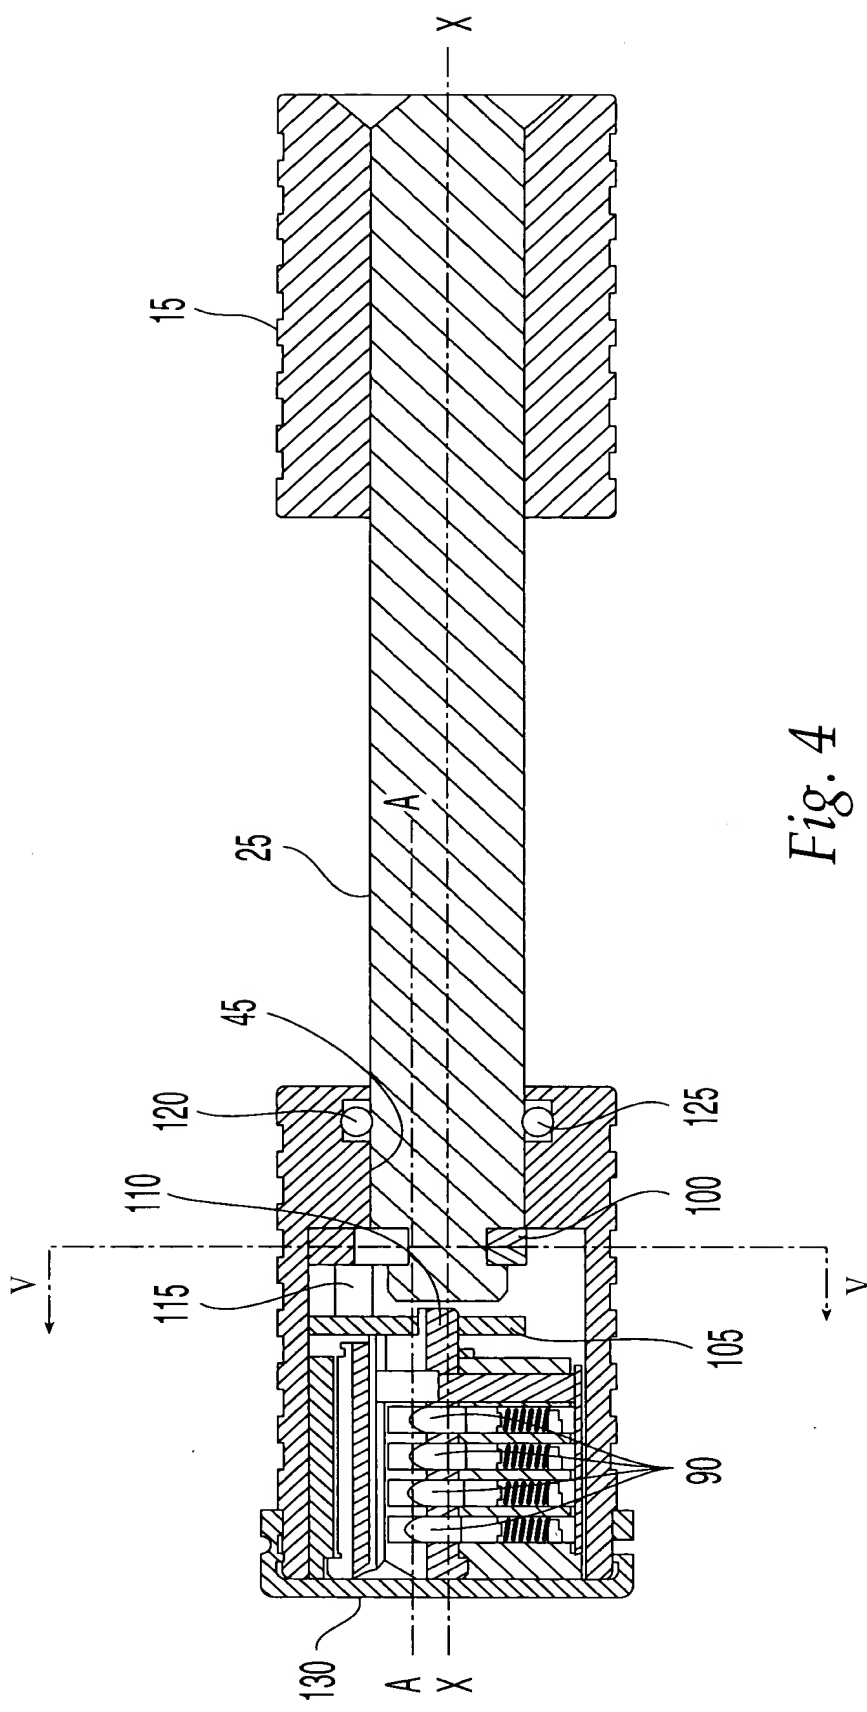


Fig. 4

FIG. 5a is a cross-sectional view of the device in the unlocked state. FIG. 5b is a cross-sectional view of the device in the locked state.

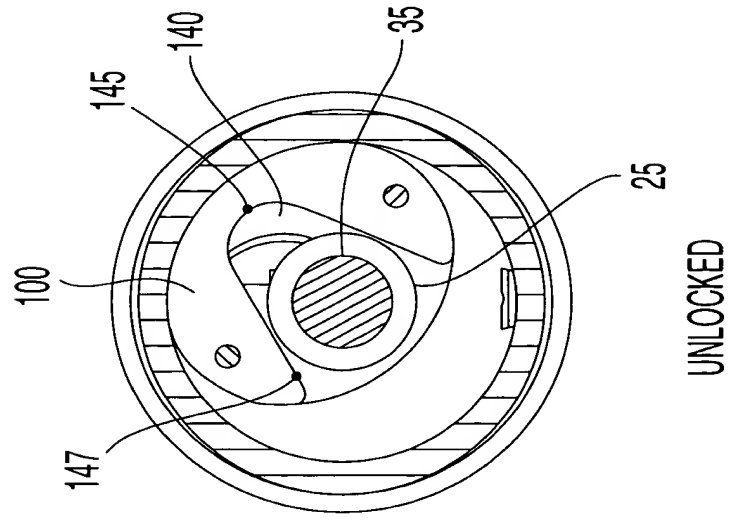


Fig. 5a



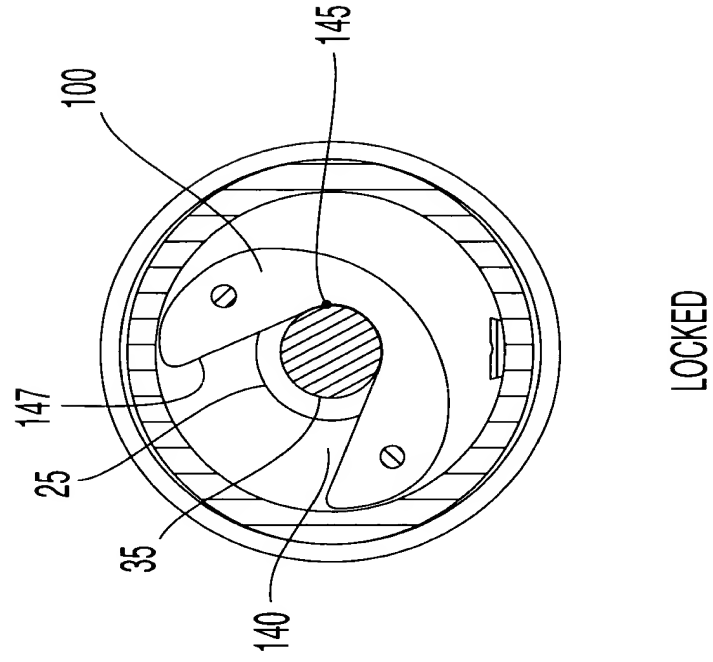


Fig. 5b

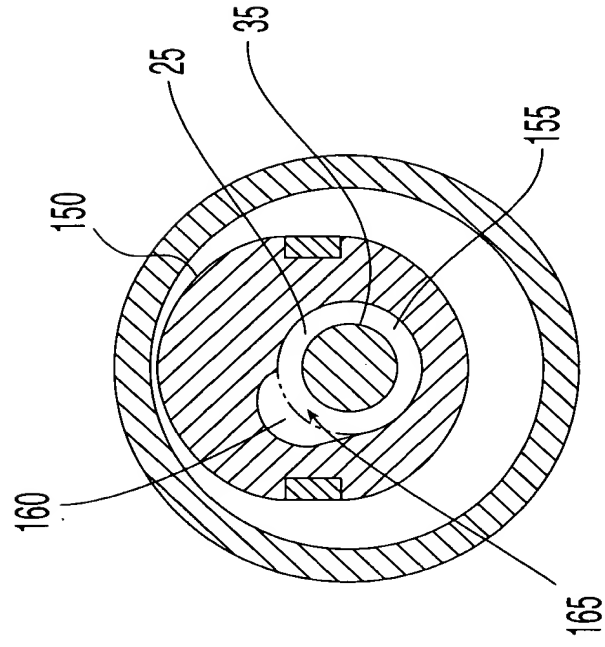

UNLOCKED

Fig. 6a

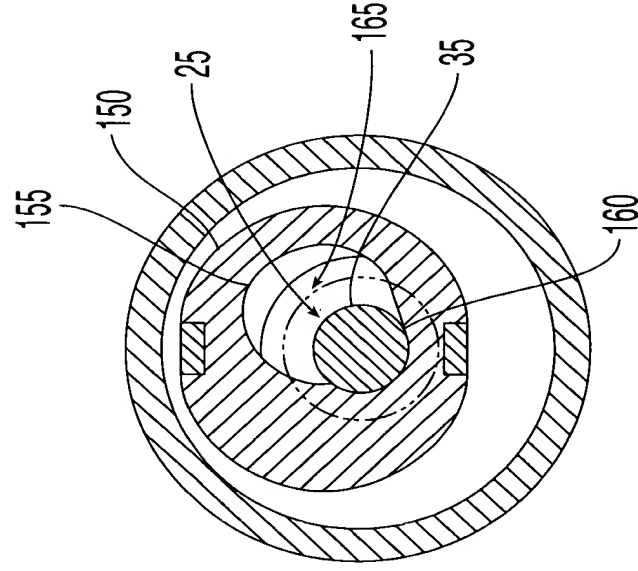

LOCKED

Fig. 6b